


TRONSON "B"

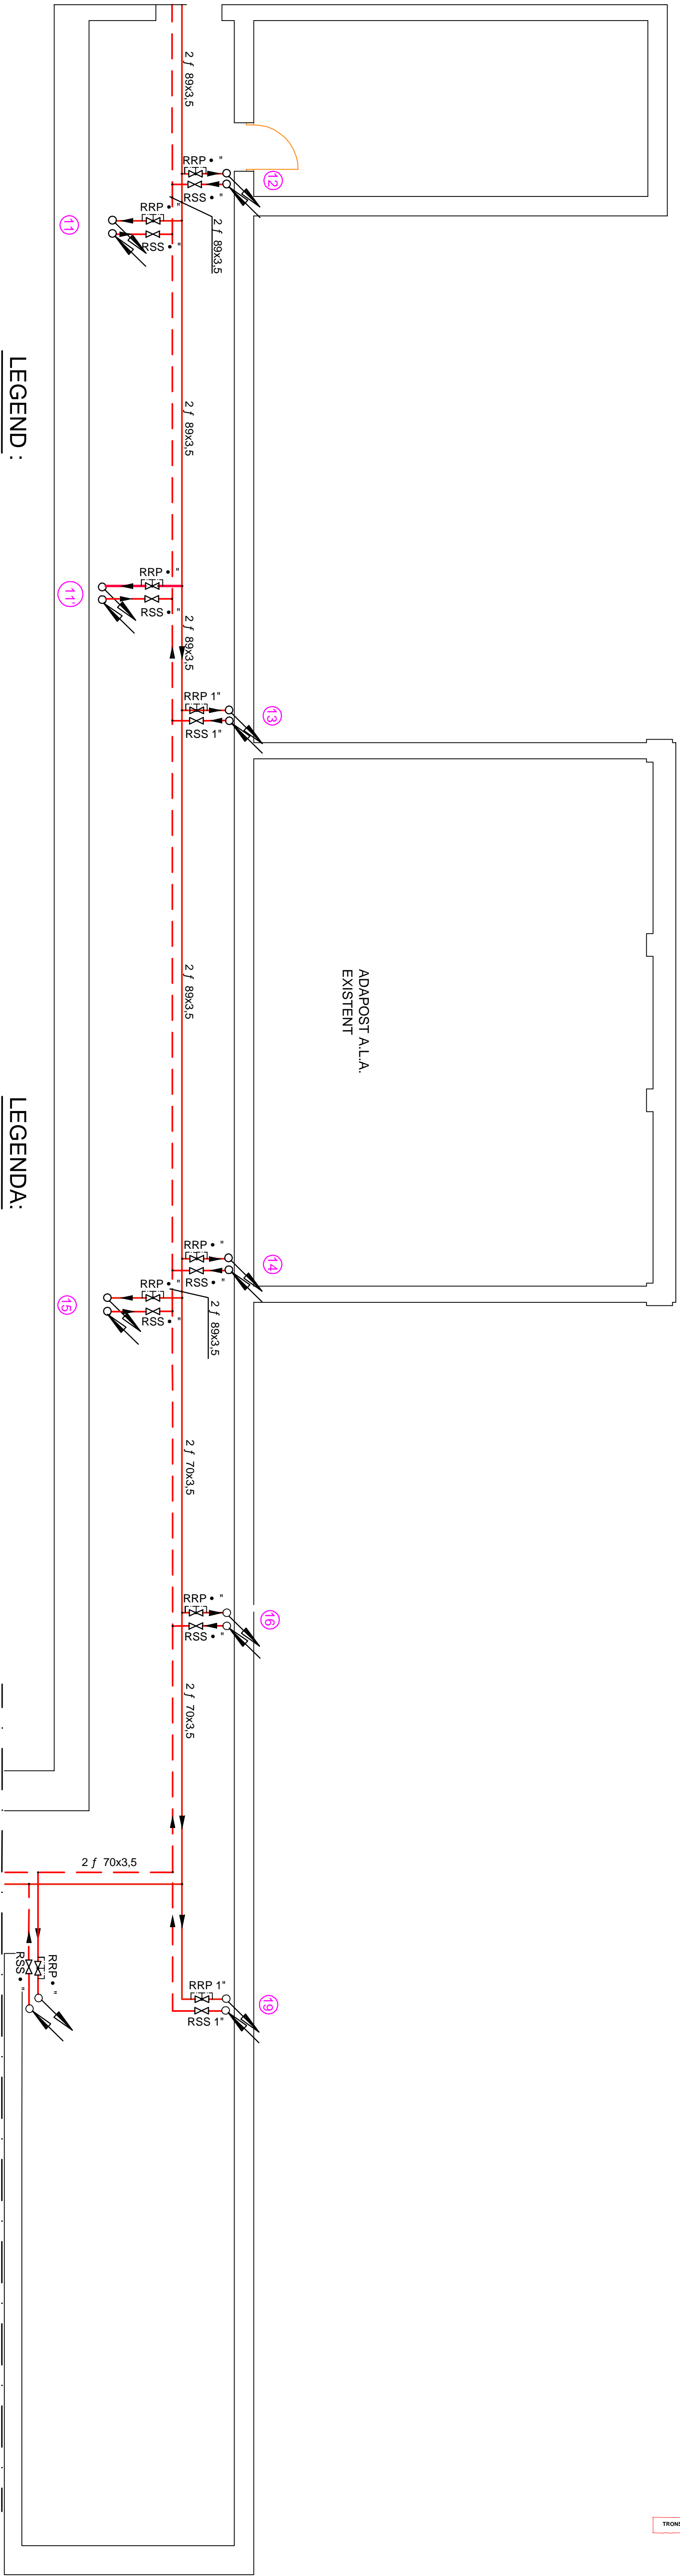

LEGEND :

- Heating flow line (from copper and steel pipe)
- Heating falling line (from copper and steel pipe)
- Steel heater, 1500 mm - length, 600 mm - height and two columns with angle valve, (1/2" diameter) turn-return, total thermal power loss (normal conditions) 4,744 W
- DM Manual deaeration outfit, mounted on the heater, f 1/2"
- RAA • • Automatic valve for deaeration, assembled on the upsides end, f 1/2"
- RT Angle control valve, assembled on the heater, on flow line f 1/2"
- RR Angle valve, simple adjustment, assembled on the heater's return line, f 1/2"
- RG 3/8" Globe bib cock, f 3/8"
- RSS 1 1/4" Automatic valve for deviating, f 1 1/4"
- RRP • • Automatic valve for pressure adjustment, 3/4"
- RSF100 Separating slice valve with flanges, ND 100, NP 6 bar

NOTE :

*The present drawing will be consulted together with following plans :

- A-T-001, A-T-003, A-T-004, A-T-005,A-T-006, A-T-007 , A-T-008, A-T-009,
- A-T-010, A-T-011, A-T-012, A-T-013, B-T-001. B-T-002 and B-T-003


LEGENDA:

- Conducta incalzire, tur (teava de cupru si teava de oel)
- Conducta incalzire, retur (teava de cupru si teava de oel)
- Radiator din oel, cu lungime de 1800mm, inaltimea de 600mm si doua coloane, cu ventili de diametru 1/2" (tur/retur), putere totala cedata in conditi nominale 4744W
- DM Dispozitiv manual de aerisire montat la radiator, f 1/2"
- RAA • • Robinet automat de aerisire, montat la capatul coloanei, H=2,5 m, f 1/2"
- RTS Robinet de trecere cu sfera, montat la radiator pe conducta de tur, f 1/2"
- RR Robinet coltar, simplu reglaj, montat la radiator pe conducta de retur, f 1/2"
- RG3/8" Robinet cu racord portunuri, pentru goliie f 3/8"
- RSS 1 1/4" Robinet de secționare cu sfera, f 1 1/4"
- RRP • • Robinet automat de reglare a presiunii, f 3/4"
- RSF100 Robinet de secționare cu setar si flansă, Dn 100, pn 6 bari

NOTA :

*Prezentul desen se va consulta impreuna cu planurile : A-T-001,

- A-T-003, A-T-004, A-T-005,A-T-006, A-T-007 , A-T-008, A-T-009,
- A-T-010, A-T-011, A-T-012, A-T-013, B-T-001. B-T-002 and B-T-003



TRONSON "A"
